

SPEC. INFO	FL-BC3518-9M	K65984-S001-B13
		Mar. 05. 2015

1. Model FL-BC3518-9M
2. Application For 1 Format Camera

3. Specification

3-1. Physical (As per the attached drawing)

- (1) Dimensions $\phi 42.0 \text{ mm} \times 60.5 \text{ mm}$
- (2) Weight 1 5 0 g
- (3) Mount C-Mount (1 – 32 UN – 2A)
- (4) Filter Screw Size M40.5 mm , P = 0. 5 mm

3-2. Optical

- (1) Focal Length 35 mm $\pm 5\%$
- (2) Max. Aperture Ratio 1: 1.8
- (3) Iris Range F / 1.8 to F / 22
- (4) Angle of View
 Diagonal 25.7°
 Horizontal 20.7°
 Vertical 15.6°
- (5) Picture format 12.8 mm \times 9.6 mm
- (6) Focusing Range Inf. to 0.15 m
- (7) Back Focal Length 16.8 mm (in air)
- (8) Flange Back Length 17.526 mm \pm 0.05 mm (in air)

3-3. Mechanical

- (1) Focusing Mechanism Straight Helicoid
 Rotation Angle 311°
 Rotation Torque 0.2N·cm to 1 0.0 N·cm
 Focus Ring can be fixed at any positions by 3 fixing screws (A) or 1 thumb screw (refer to external view)
- (2) Iris Mechanism Non-click, Close-down
 Rotation Angle 85°
 Rotation Torque 0.01N·cm to 3.0 N·cm
 Iris Ring can be fixed at any positions by 3 fixing screws (B) or 1 thumb screw (refer to external view)

3-4. Vibration & Shock Test Standard

(1) Vibration Conditions

Wave	Sine Wave
Acceleration	1.96 m/s ² to 59.78 m/s ²
Cycle Range	10 Hz to 55 Hz
Cycle Period	3 Minutes
Duration of Vibration	120 Minutes Respectively in Three Dimensional Directions

(2) Shock Conditions

Tester	Shock Testing Machine by Dropping
Impact Force	588 m/s ²
Duration of Shock	3.5 ms
Directions & Number of Times	1 Time Respectively in Three Dimensional Directions



SPEC. INFO	FL-BC3518-9M	K65984-S001-B23
		Mar. 05. 2015

3-5. Environmental Temperature Range -10°C to $+50^{\circ}\text{C}$

4. Accessories

- | | | |
|-----------------------------------|----------|----------------------|
| (1) Front Lens Cap | 1 piece | |
| (2) Rear Lens Cap | 1 piece | |
| (3) Fixing Screw ① for Focus Ring | 3 pieces | |
| (4) Fixing Screw ② for Iris Ring | 3 pieces | |
| (5) Thumbscrew for Focus Ring | 1 pieces | (for Optional Usage) |
| (6) Thumbscrew for Iris Ring | 1 pieces | (for Optional Usage) |
| (7) Packing Box | 1 piece | |

(A) Fixing Screw for Focus Ring
 3 positions
 Focus Ring
 Iris Ring
 (B) Fixing Screw for Iris Ring
 3 positions

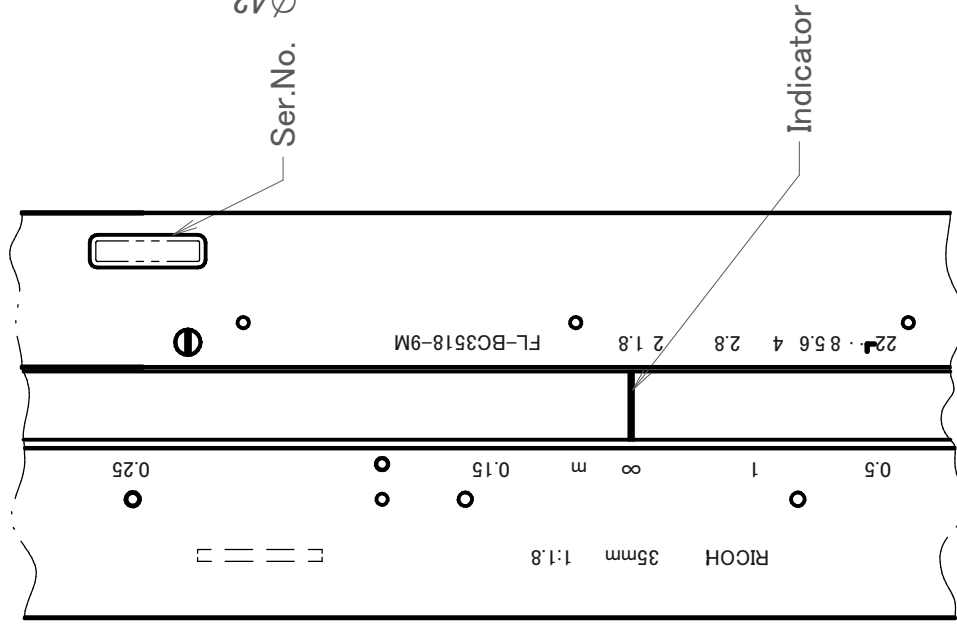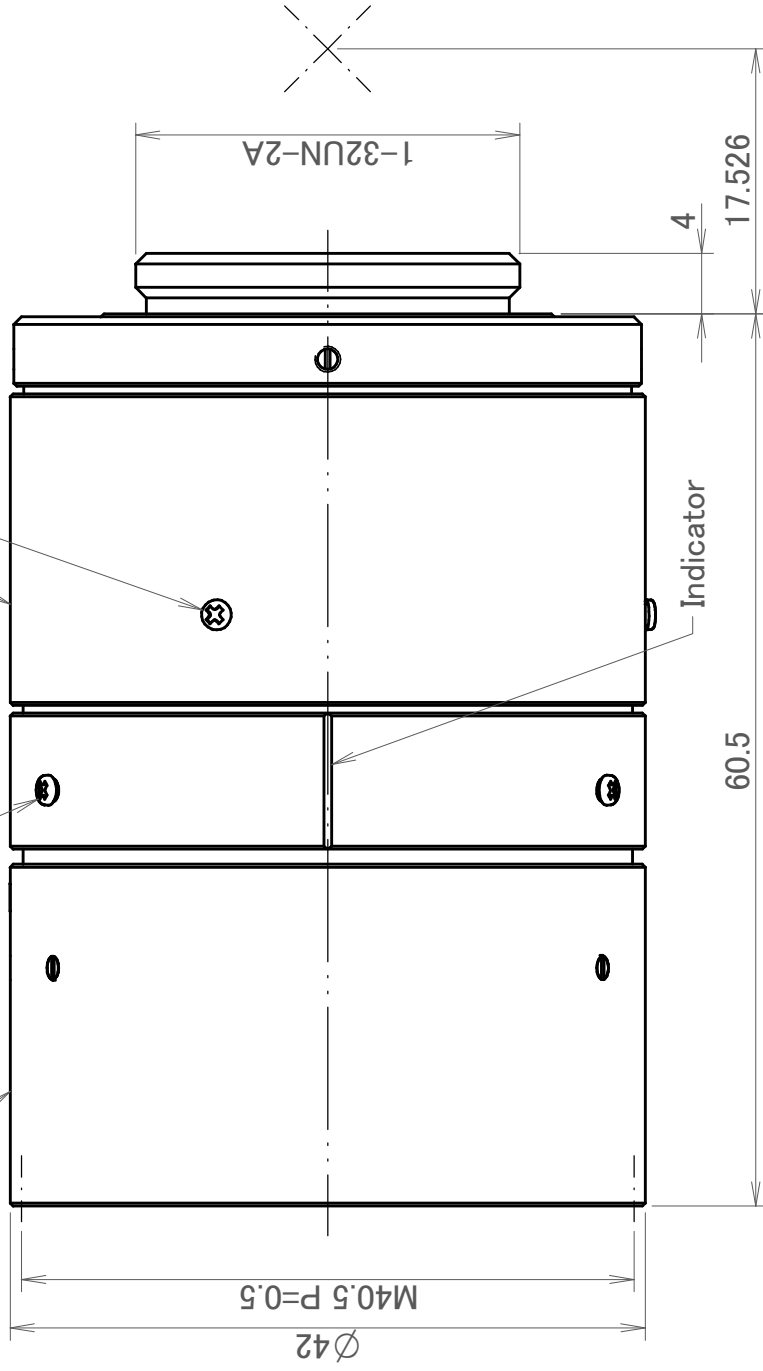

<p>(A) Fixing Screw for Focus Ring (3 pieces)</p> <p>M1.4 3</p>	<p>(B) Fixing Screw for Iris Ring (3 pieces)</p> <p>M1.4 2.2</p>
<p>Thum Screw for Focus Ring Optical Usage (1 piece)</p> <p>M1.4 (4) 8</p>	<p>Thum Screw for Iris Ring Optical Usage (1 piece)</p> <p>M1.4 (4) 6.3 2.3</p>

SPEC.INFO	FL-BC3518-9M
	K65984-S001-B33
RICOH Industrial Solutions Inc. Mar.05.2015	