

HB-12000 Series

HB-12000-M Monochrome
HB-12000-C Color



HB-12000: 25GigE camera with AMS CMV12000

HB-12000 features the CMV12000 CMOS sensor by AMS. Benefits include high resolution, high speed and overall high performance. At full resolution (4096 x 3072), you get 188 frames per second. Its ultra high-speed 25GigE SFP28 interface offers many benefits including low-cost accessories, low CPU overhead, low latency, low jitter, and accurate multi-camera synchronization using IEEE1588. In addition, 25GigE SFP28 offers three supported cabling options for cable lengths from 1M to 10KM.

Benefits

- » High-speed 25GigE SFP28
- » 25x the speed of GigE
- » Ultra high data/frame rates
- » GigE Vision® and GenICam™ compliant
- » Optional IP67 housing

Applications






- » Virtual Reality
- » Goal Line Technology
- » Volumetric Capture
- » Motion Capture
- » Immersive 3D Content
- » Finish Line Vision
- » Referee Assist
- » Flat Panel Inspection
- » Machine Vision

Specifications


Sensor	CMV12000
Resolution	4096 x 3072
Megapixels	12MP
Sensor Type	28mm CMOS
Max Frame Rate	188fps
Cell Size	5.5x5.5µm
Standard Mount	M42x1x12mm BFL, Optional F Mount Available
Shutter	Global
Bit Depth	8 or 10 Bit
GPIO / Triggering	3 in, 3 out Software, External (Pulse or Edge)
Interface	25GigE SFP28
Exposure/Integration*	10µs-1s
Dynamic Range	60 dB
Monochrome Modes	Mono8, Mono10, Mono10Packed
Color Modes	RGB8, BGR8, YUV411, YUV422, YUV444
Raw Modes	BayerGR8, BayerGR10, BayerGR10Packed
Operating System	Win10 (64 bit), Linux (64 bit)
Compliance	CE, FCC, RoHS, WEEE, GigE Vision, GenICam
Power Requirements	9W, 12V
Operating Temperature	0C - 45C
Storage Temperature	-30C to +60C
Dimensions & Weight	97 x 66 x 73 - 600g
Warranty	2 Years

*all minimum exposure specs can vary from what is listed based on the limitations of each sensor as per notice from the manufacturer.

Mechanical drawings

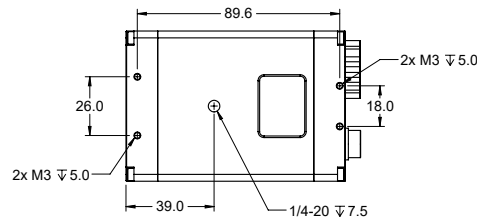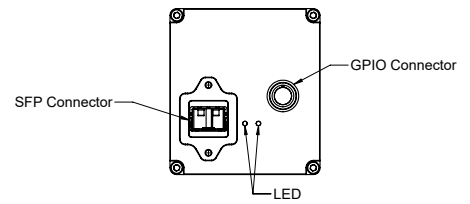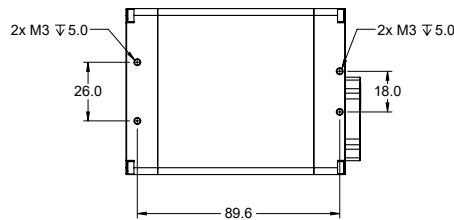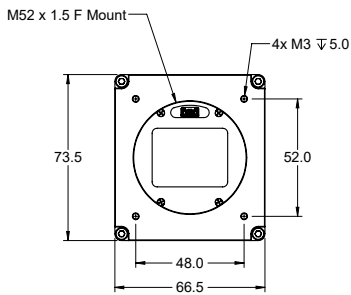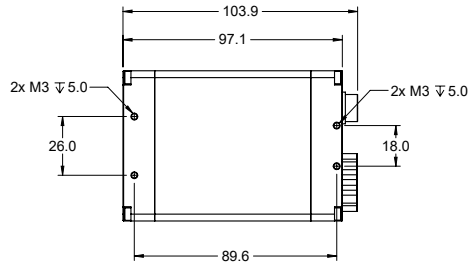

Spectral Sensitivity

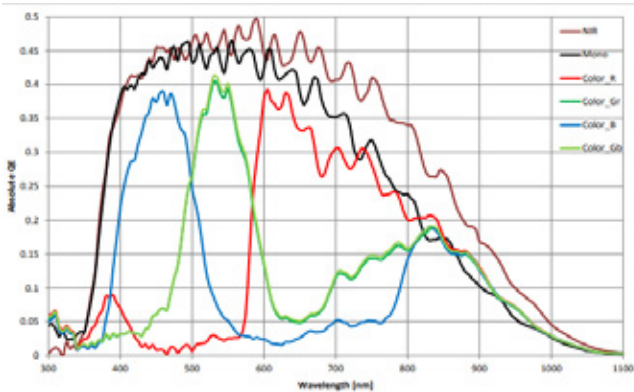

Any Questions?

1-866-780-6082

sales@emergentvisiontec.com

<https://emergentvisiontec.com>