



# 2-JAW PARALLEL GRIPPERS WITH LONG STROKE INSTALLATION SIZE GH6060

## PRODUCT SPECIFICATIONS




### Gripping force diagram

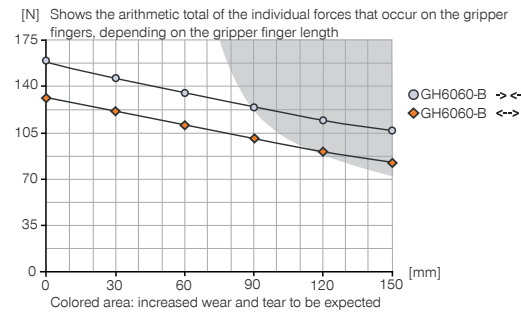

### Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	50
Mx [Nm]	50
My [Nm]	50
Fa [N]	500

## INCLUDED IN DELIVERY



Mounting block

KB6.5-04



Centering Disc

DST40400



Flow Control Valves - with Swivel joint


DRVM5X4

## RECOMMENDED ACCESSORIES



Universal Jaw Aluminium

UB6000-B



Inductive proximity switch - Cable 5 m

NJ6.5-E2-01



Inductive proximity switch - Connector M8

NJ6.5-E2S



Magnetic field sensor Angled Cable 5 m

MFS103KHC



Magnetic field sensor Angled Cable 0,3 m - Connector M8

MFS103SKHC




Magnetic field sensor Straight Cable 5 m

MFS204KHC




Magnetic field sensor Straight Cable 0,3 m - Connector M8

MFS204SKHC



Plug-in connector Straight Cable 5m - Socket M8 (female)

KAG500



Plug-in connector Angled Cable 5m - Socket M8 (female)

KAW500




Pressure Safety Valve

DSV1-8

Order no.	Technical Data*
Stroke per jaw [mm]	60
Gripping force in closing [N]	155
Gripping force in opening [N]	130
Closing time [s]	0.25
Opening time [s]	0.25
Repetition accuracy +/- [mm]	0.05
Operating pressure min. [bar]	3
Operating pressure max. [bar]	8
Operating temperature min. [°C]	5
Operating temperature max. [°C]	+80
Air volume per cycle [cm³]	30
Weight [kg]	0.6


\*All data measured at 6 bar

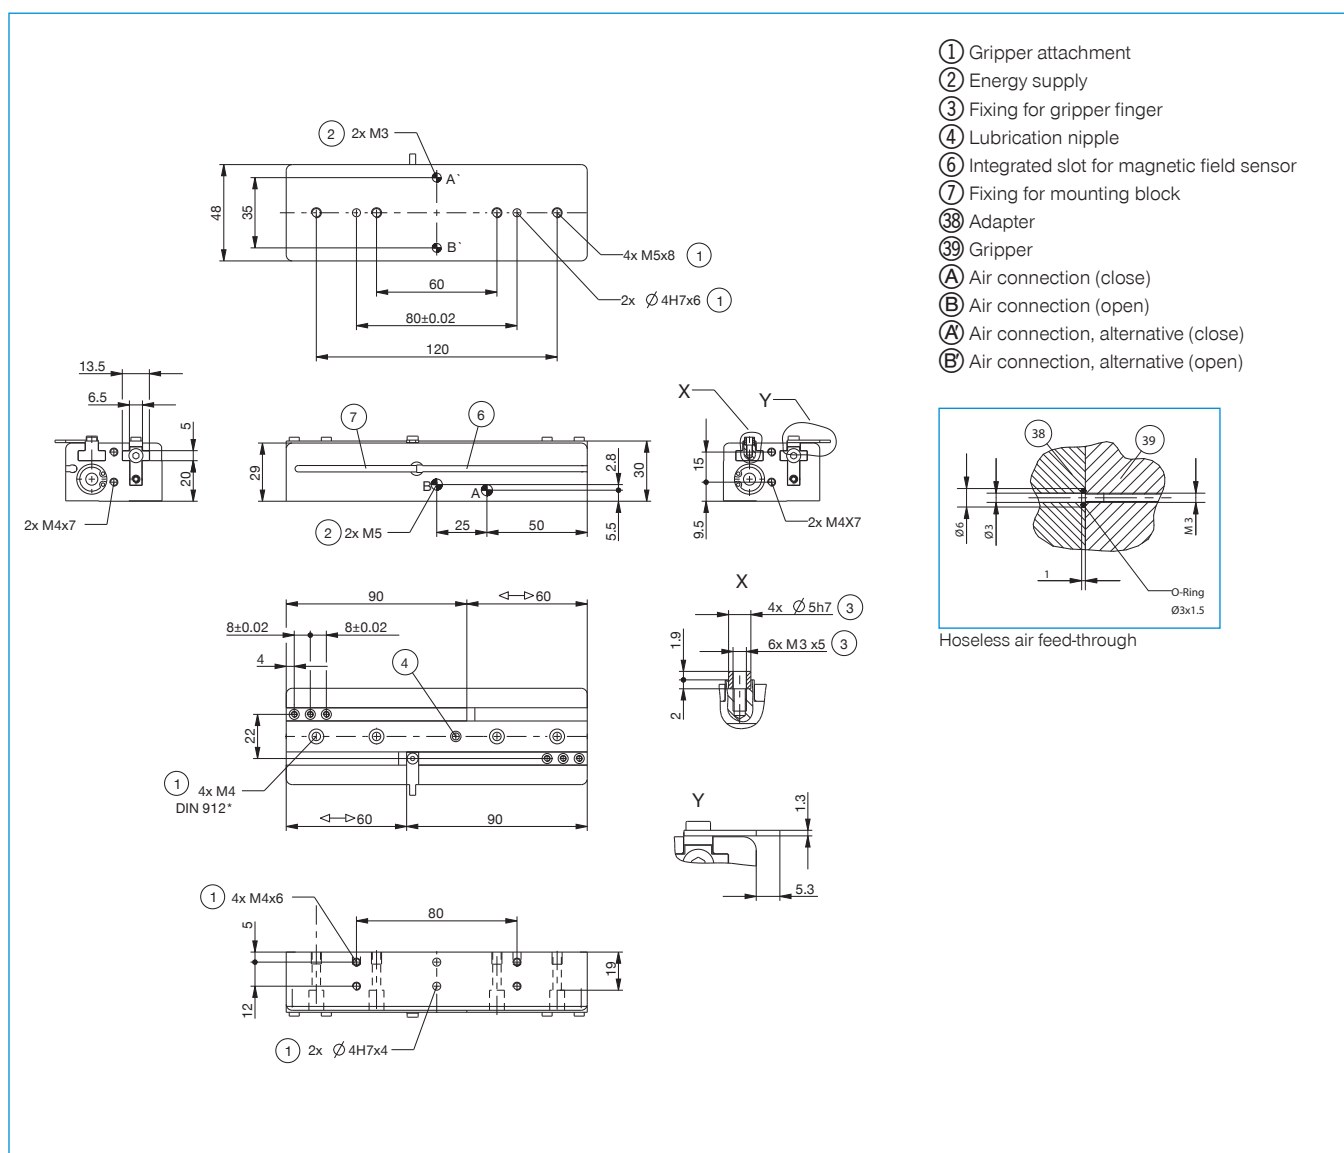

# 2-JAW PARALLEL GRIPPERS WITH LONG STROKE SERIES GH6000

1

## ▶ PRODUCT ADVANTAGES

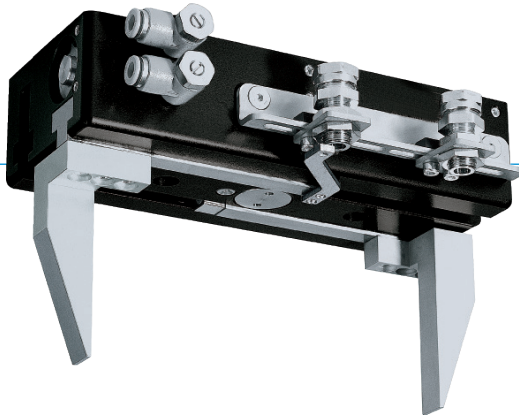

### “The robust”

#### ▶ Gripper jaws may be up to 25% longer in comparison to the benchmark

The highest force and torque measurement enables flexible for maximum dynamics

#### ▶ Over 30% more powerful than the benchmark

Optimisation of weight and force reduces your application costs since all components can have a smaller scale

#### ▶ Failure-free continuous operation

Our uncompromising „Made in Germany“ quality guarantees up to 10 million maintenance-free cycles

## ▶ THE BEST PRODUCT FOR YOUR APPLICATION



#### ▶ Our products welcome the challenge!


Extreme conditions, all over the world—our tried and tested components and systems give you endless possibilities.

Find the best product for your specific use:

[www.zimmer-group.de](http://www.zimmer-group.de)




## ► BENEFITS IN DETAIL

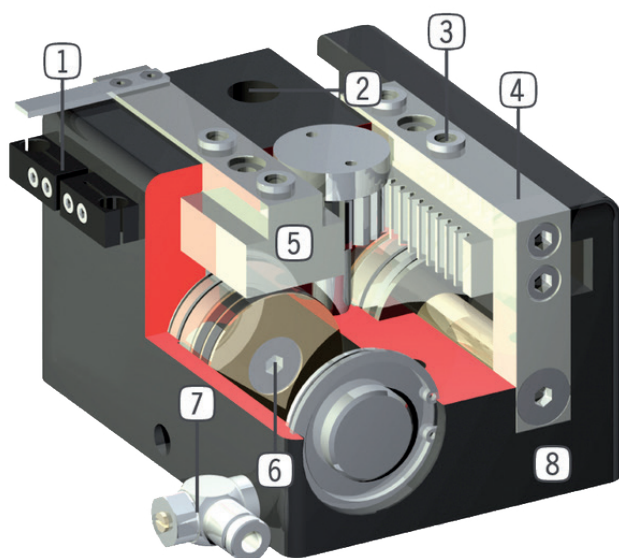

- ① **Mounting block**
  - mounting for inductive proximity switch
- ② **Mounting and positioning**
  - mounting possible from several sides for versatile positioning
- ③ **Removable centering sleeves**
  - quick and economical positioning of the gripper fingers
- ④ **Gripper jaw**
  - individual gripper finger mounting
- ⑤ **Precise long T-Slot guides**
  - high forces and moments capacity
- ⑥ **Drive**
  - two double-acting pneumatic cylinders
  - synchronized by gearwheel
- ⑦ **Energy supply**
  - possible from several sides
  - CAUTION: always operate long stroke gripper with supplied exhaust air flow control valve (speed regulation)
- ⑧ **Robust, lightweight housing**
  - Hard-coated aluminum alloy

## ► SERIES CHARACTERISTICS



Number of installation sizes	5
Stroke per jaw	20 mm - 200 mm
Gripping force	120 N - 3400 N
Weight	0,3 kg - 23,8 kg
AP class	3



10 million maintenance-free cycles (max.)



Inductive sensor



IP40



Magnetic field sensor